


MAGPUL INDUSTRIES CORP - TECH NOTE - CTR-001

PRODUCT
WEAPON
CATEGORY
DIFFICULTY LEVEL
PUBLISHED


CTR
AR15/M16
Installation
Easy
11.14.06

CTR
AR15/M16

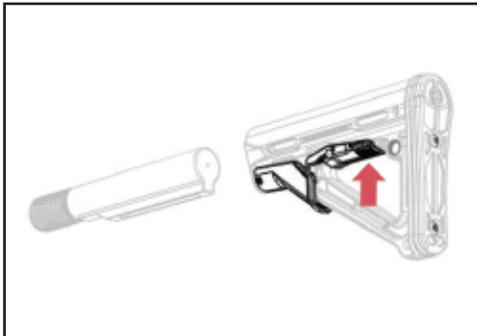


STEP 1 - Stock Preparation

STOP! There are two versions of the CTR; one for mil-spec carbine-length receiver extensions, and one for proprietary carbine-length receiver extensions. Depress the *adjustment lever* to disengage the *friction lock*. **If the stock does not slide over the receiver extension, contact Magpul for a replacement at 1.877.4MAGPUL!**

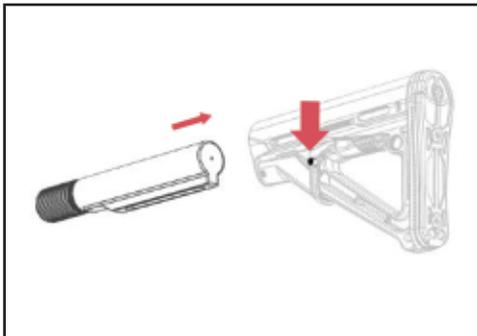


STEP 2 - Stock Installation

Pull down on the pin just above the *friction lock*, and slide the stock the rest of the way on to the carbine-length receiver extension.

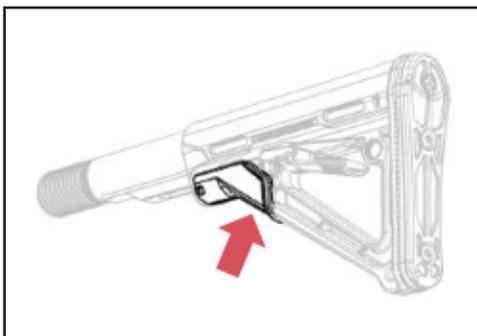

STEP 3 - Friction Lock Test

With the stock installed and secured in position, depress the *friction lock* - there should be zero movement in the stock.

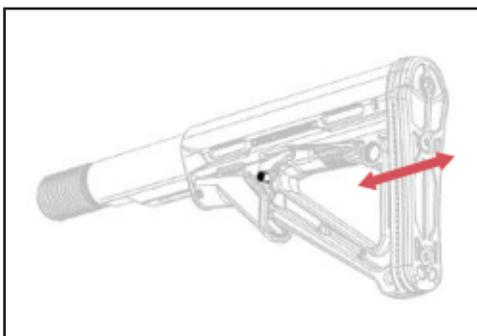

STEP 4 - Function Check

Depress the *adjustment lever* and slide the stock forward and back to check for proper function. If you are unsure of your work, have a qualified gunsmith examine the rifle prior to loading or firing the weapon.